




Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets



Bescheinigung

Certificate

Attestation


Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

04300084.3

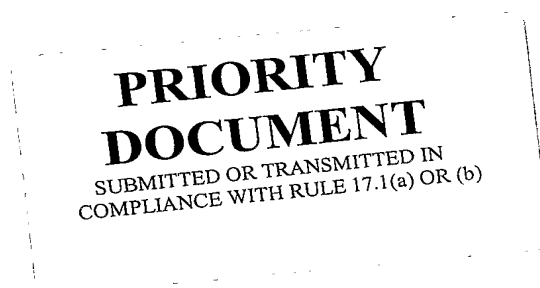

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

R C van Dijk





Anmeldung Nr:  
Application no.: 04300084.3  
Demande no:

Anmeldetag:  
Date of filing: 17.02.04  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.  
Groenewoudseweg 1  
5621 BA Eindhoven  
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se referer à la description.)

Method of visualizing a large still picture on a small-size display

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)  
revendiquée(s)  
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

H04N7/64

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL  
PT RO SE SI SK TR LI



**Method of visualizing a large still picture on a small-size display****FIELD OF THE INVENTION**

The present invention relates to a method of and a device for visualizing a large still  
5 picture on a display having a size smaller than the large still picture.

It may be used, for example, in mobile apparatuses, such as a mobile phone or a  
personal digital assistant PDA, comprising a display having a reduced size.

**BACKGROUND OF THE INVENTION**

10 The European patent application number EP 1162810 discloses a conversion method  
in which the moving image data distribution processing is used to split a still image into  
multiple pieces, to extend each piece to produce a plurality of still images and, from the  
extended still images, to create data in the continuous still image display format. Continuous  
display of the pieces created by splitting the still image allows the user viewing the entire  
15 image on a small-size screen, such as that of a mobile phone, without having to reduce the  
image.

However, such a process is done at a server side, said server sending the sequence of  
pieces of the still image to a mobile phone in accordance with the requests of the user of said  
mobile phone, said requests being made interactively using a cursor. In other words, the user  
20 does not receive a video sequence as such but independent pieces of the still image as a  
function of its requests. As a consequence, the large still image cannot be seen very  
conveniently on the display of the mobile apparatus.

**SUMMARY OF THE INVENTION**

25 It is an object of the invention to propose a method of visualizing a large still picture  
which is more convenient for the user.

To this end, the method in accordance with the invention is characterized in that it  
comprises the steps of:

- dividing the large still picture into a set of pieces, said pieces having a size  
30 substantially equal to the display size,
- ranking the pieces of the large still picture according to a predetermined scanning  
order, and
- encoding the set of pieces using a predictive block-based compression technique  
according to said predetermined scanning order so as to obtain a video sequence.

The method in accordance with the invention allows a large still picture to be converted into a sequence of smaller pictures derived from the large still picture, said smaller pictures corresponding to pieces of the large still picture. Thanks to such a conversion method, a user can see a large still picture in the form of a video sequence automatically generated according to a predetermined scanning pattern. Therefore, such a conversion method makes the visualization of the large still picture much more convenient and much more attractive than the one of the prior art.

According to an embodiment of the invention, the pieces of the large still picture overlap each other and the dividing and ranking steps are based on a travelling shot adapted to cover at least a part of the large still picture. In such a case, the resulting video sequence, when encoded, yields high compression ratios thanks to the intrinsic high level of linear correlations between each piece of the large still picture. Moreover, the encoded video sequence can be smaller than the encoded large still picture depending on the desired image quality.

According to another embodiment of the invention, the conversion method in accordance with the invention further comprises a step of detecting contours within the large still picture. In such a case, the dividing and ranking steps are based on a continuous scanning of the contours detected by the step of detecting contours.

Still according to another embodiment of the invention, the conversion method in accordance with the invention further comprises a step of zooming a part of the large still picture.

The present invention also relates to a device for implementing the conversion method in accordance with the invention.

The present invention finally relates to a computer program product comprising program instructions for implementing said conversion method.

These and other aspects of the invention will be apparent from and will be elucidated with reference to the embodiments described hereinafter.

## BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will now be described in more detail, by way of example, with reference to the accompanying drawings, wherein:

- Figure 1 corresponds to a first embodiment of the implementation of the dividing and scanning steps according to the present invention;

- Figure 2 corresponds to another embodiment of the implementation of the dividing and scanning steps according to the present invention;
- Figure 3 corresponds to still another embodiment of the implementation of the dividing and scanning steps according to the present invention.

5

## DETAILED DESCRIPTION OF THE INVENTION

The present invention relates to a method of and a device for automatically converting a large still picture into a video sequence.

Said conversion method enables users to discover a large still picture piece by piece.

10 It can be used, for example, to discover large images at high resolutions on small screens.

The video sequence is obtained according to the following conversion method. In order to exemplify the following description, let us suppose that we have a large still picture comprising 1024x768 pixels and that we want to display said picture on a screen having a size of 128x128 pixels. The large still picture is, for example, stored in the memory of a remote server or in the memory of a mobile apparatus comprising the screen. Said large still picture is stored either according to an encoded format, for example the JPEG format, or according to a non-encoded or a decoded format.

20 If the large still picture is stored according to an encoded format, the conversion method in accordance with the invention comprises a step of decoding the encoded large still picture as a function of its encoding format so as to obtain a decoded large still picture.

In a next step, the conversion method comprises a step of dividing the decoded large still picture into a set of pieces of equal size, said pieces having a size which is substantially equal to the screen size, namely 128x128 pixels in our example. It will be apparent to a person skilled in the art that the pieces of the large still picture do not necessary have the same size as the screen size but should have a size which is close to said screen size in order to be easily displayed on said screen, i.e. without any further format conversion process or with a simple one.

25 Then, in a next step, the conversion method comprises a step of ranking the pieces of the large still picture according to a predetermined scanning order.

30 According to a first embodiment of the invention depicted in Figure 1, the pieces (21) of the large still picture (20) are contiguous, which means that we have a large still picture which has been divided into 48 pieces. In this case, the large still picture is scanned from left

to right, then from top to down, then from right to left and so on as shown by the arrows (22). This embodiment is particularly easy to implement.

According to another embodiment of the invention depicted in Figure 2, the pieces (23) of the large still picture (20) overlap each other, which means that we have a large still picture which is divided in much more than 48 pieces. For example, if the grid corresponding to a piece of the large still picture is shifted horizontally (24) from half the width of a piece (i.e. 64 pixels in our example) and vertically (25) from the height of a piece (i.e. 128 pixels in our example) at the end of a raw of the large still picture, as illustrated in Figure 2, 96 pieces are derived. The large still picture is then scanned from left to right, then from top to down, them from right to left and so on as shown by the arrows (24,25). With such an embodiment, the large still picture can be covered in a rather progressive way just like a travelling shot. It will be apparent to a person skilled in the art that the value of the shift can be adjusted both in a horizontal and a vertical direction depending on the traveling effect to be obtained and on the memory size of the video sequence to be achieved.

Still according to another embodiment of the invention depicted in Figure 3, the conversion method in accordance with the invention comprises a step of detecting the contours of at least one object, for example a football player as illustrated in Figure 3. Said step of detecting contour is based, for example, on the use of a gradient filter or on any other principle known to a person skilled in the art. The dividing step then consists in covering the at least one object with a set of pieces, said pieces being superimposed or being contiguous, as shown in Figure 3. Then the ranking step defines a specific scanning order (1-15) following, for example, the contours from left to right and from top to bottom until the center of the object is reached, as shown by the arrows. In a final step a zoom out is executed so as to let the viewer discover the whole large still picture which is down-sampled at a lower resolution, said down-sampled picture forming the final picture (16) of the video sequence. Thanks to such an embodiment, only the most interesting or attractive areas of the large still picture are provided to the user in the form of a video sequence.

In the case where the pieces of the large still picture overlap each other, said pieces are shifted according to predetermined horizontal and vertical shifts, as explained before. It will be apparent to a person skilled in the art that the value of the shifts are not necessarily constant but can be variable depending on the content of the large still picture. For example, the shift can be very small when pieces of picture cover the face of the football player or the ball, the travelling shot being slow in this case. Inversely, the shift is bigger when pieces cover other parts of the footballer's body.



It will be apparent to a person skilled in the art that the scanning pattern is by no way limited to the above-described examples. For example, the large still picture is not necessarily entirely covered by a set of pieces nor is said large still picture coverage only limited to a minimum part of the large still picture. As another example, some pieces of the large still picture can have different spatial resolution. It is for example the case if the complete video sequence or a part of it corresponds to a progressive zoom in or zoom out of the large still picture.

Once the scanning pattern has been defined, the conversion method in accordance with the invention comprises a step of encoding the set of pieces of the large still picture using a predictive block-based compression technique according to said scanning order so as to obtain the video sequence. Said encoding step is based, for example, on the MPEG-2 or 4 standard, or on the H.263 or H.264 standard.

It should be noted that the decoding, dividing, ranking, (optionally contour detection) and encoding steps can be performed either by a remote server, the resulting video sequence being sent to a mobile apparatus adapted to play said video sequence, or directly by the mobile apparatus if said apparatus has sufficient memory and computational resources.

For example, if the different steps are performed by the remote server, a content distributor (e.g. a magazine on line) can make a high resolution photography available on its web site in the form of a video sequence, as an alternative or additional feature of the original picture. As another example, if the different steps are performed by the mobile apparatus, the user can convert a large still image into a video sequence and send it to another user, for example using a MMS (Multimedia Message Service).

Therefore, the invention consists in a automatic method by which a user can select a large still picture, select a given scanning pattern, for example one of the above-described scanning pattern and generate the video sequence.

In order to play said video sequence, the mobile apparatus further comprises means for decoding the video sequence as a function of its encoding format, and means for rendering and displaying the decoded video sequence. The result for the user is a very attractive video sequence, which allows the large still picture to be seen in a very convenient way on the display of the mobile apparatus.

The conversion method in accordance with the invention can be implemented by means of items of hardware or software, or both. Said hardware or software items can be implemented in several manners, such as by means of wired electronic circuits or by means of an integrated circuit, e.g. a processor, that is suitable programmed, respectively. The

integrated circuit can be contained in a portable apparatus. The integrated circuit comprises a set of instructions. Thus, said set of instructions contained, for example, in a memory of the portable apparatus may cause the integrated circuit to carry out the different steps of the conversion method. The set of instructions may be loaded into the memory by reading a data carrier such as, for example, a disk. A service provider can also make the set of instructions  
5 available via a communication network such as, for example, the Internet.

Any reference sign in the following claims should not be construed as limiting the claim. It will be obvious that the use of the verb "to comprise" and its conjugations do not exclude the presence of any other steps or elements besides those defined in any claim. The  
10 word "a" or "an" preceding an element or step does not exclude the presence of a plurality of such elements or steps.

**CLAIMS**

- 1        A method of visualizing a large still picture on a display having a size smaller than the large still picture, said method comprising the steps of:
- 5        -        dividing the large still picture into a set of pieces, said pieces having a size substantially equal to the display size,
- ranking the pieces of the large still picture according to a predetermined scanning order, and
- encoding the set of pieces using a predictive block-based compression technique
- 10        according to said predetermined scanning order so as to obtain a video sequence.
- 2        A method as claimed in claim 1, wherein the pieces of the large still picture overlap each other and wherein the dividing and ranking steps are based on a travelling shot adapted to cover at least a part of the large still picture.
- 15        3        A method as claimed in claim 1 or 2, further comprising a step of detecting contours within the large still picture.
- 4        A method as claimed in claim 3, wherein the dividing and ranking steps are based on
- 20        a continuous scanning of the contours detected by the step of detecting contours.
- 5        A method as claimed in any one of claims 1 to 4, further comprising a step of zooming a part of the large still picture.
- 25        6        A device for visualizing a large still picture on a display having a size smaller than the large still picture, said device comprising:
- means for dividing the large still picture into a set of pieces, said pieces having a size substantially equal to the display size,
- means for ranking the pieces of the large still picture according to a predetermined
- 30        scanning order, and
- an encoder for encoding the set of pieces using a predictive block-based compression technique according to said predetermined scanning order so as to obtain a video sequence.

7       A mobile apparatus comprising a display and the device as claimed in claim 6 for  
visualizing the large still picture on the display.

8       A computer program product comprising program instructions for implementing,  
5   when said program is executed by a processor, a method as claimed in claim 1.

**Method of visualizing a large still picture on a small-size display**

**ABSTRACT**

The present invention relates to a method of visualizing a large still picture on a  
5 display having a size smaller than the large still picture, said method comprising the steps of  
dividing the large still picture into a set of pieces, said pieces having a size substantially  
equal to the display size; ranking the pieces of the large still picture according to a  
predetermined scanning order; and encoding the set of pieces using a predictive block-based  
10 video sequence.

Reference: Fig. 3





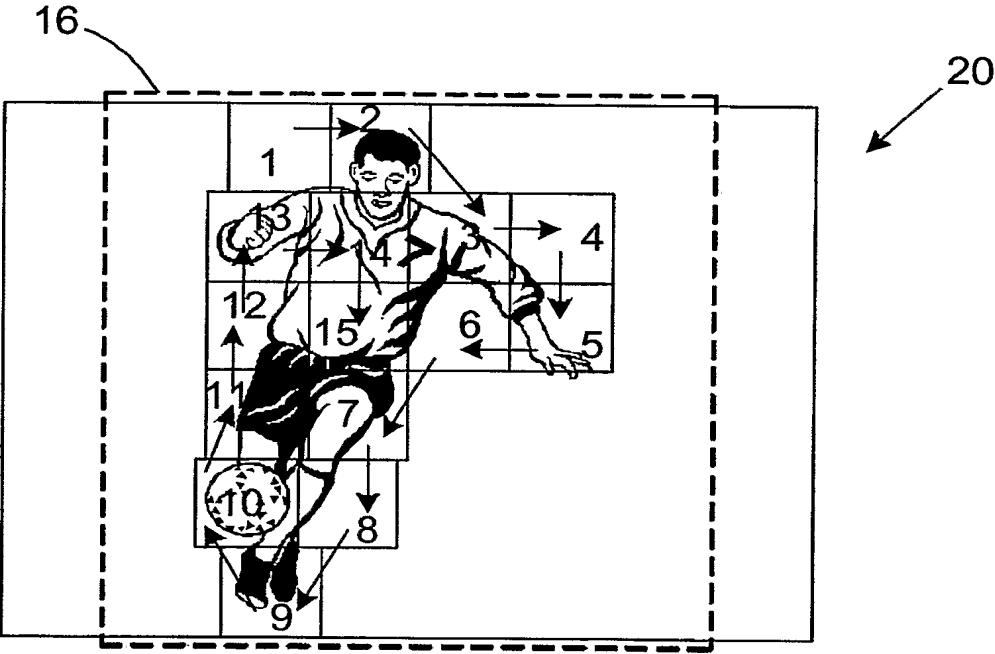


FIG. 3





**PCT/IB2005/000337**

